


SOQUETES FUNDIDOS

SOCKETS - CAST STEEL



SOQUETE FECHADO

CLOSED SPELTER SOCKET

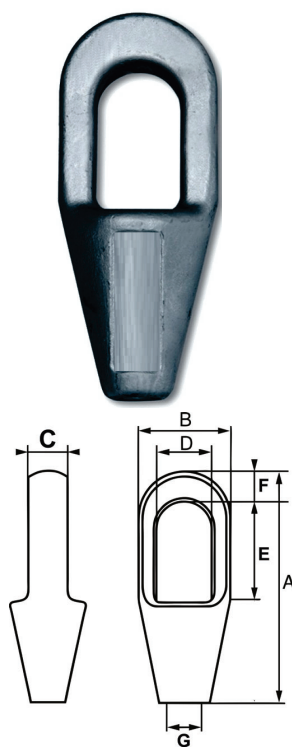

REF. SFP	Ø do cabo	Dimensões (mm)							Carga de Trab. (kgf)	Peso unit. (kg)
	(MM)	A	B	C	D	E	F	G		
SFP-1	10-12	130	46	12	30	65	15	14	1.350	0,4
SFP-2	12-14	155	61	15	37	76	19	17	1.850	0,7
SFP-3	14-18	182	73	19	45	89	24	20	2.400	1,2
SFP-4	16-20	202	82	21	50	98	26	22	3.750	1,5
SFP-5	18-22	220	90	24	54	106	30	24	5.350	2,0
SFP-6	20-24	245	100	27	60	117	34	27	5.500	3,1
SFP-7	22-28	275	113	30	67	131	38	30	7.200	4,2
SFP-8	26-30	300	125	33	73	143	42	33	9.400	5,8
SFP-9	28-34	330	138	36	80	160	45	36	11.800	8,0
SFP-10	32-38	370	153	41	89	179	51	40	14.500	11,0
SFP-11	36-44	415	170	46	100	200	56	45	20.700	15,0
SFP-12	40-50	460	190	50	110	224	62	50	23.950	20,0
SFP-13	44-54	505	206	55	120	246	69	55	27.750	27,0
SFP-14	50-62	555	228	61	132	270	76	60	35.900	35,0
SFP-15	58-72	630	258	68	150	308	85	68	44.800	50,0
SFP-16	62-76	695	285	75	165	339	94	75	55.000	67,0

Fator de Segurança 5:1
DIN 83313 - NBR 11900-5 - EN 10204